


120 VOLT WIRING JIE MOTORS

WHEN WIRING TO GEM REMOTES

Standard "T#"
 or
 Colored Wires
 Wired at 120 VAC
 JIE, Electorgear,
 & Leeson motors

Scan for VIDEO Instructions

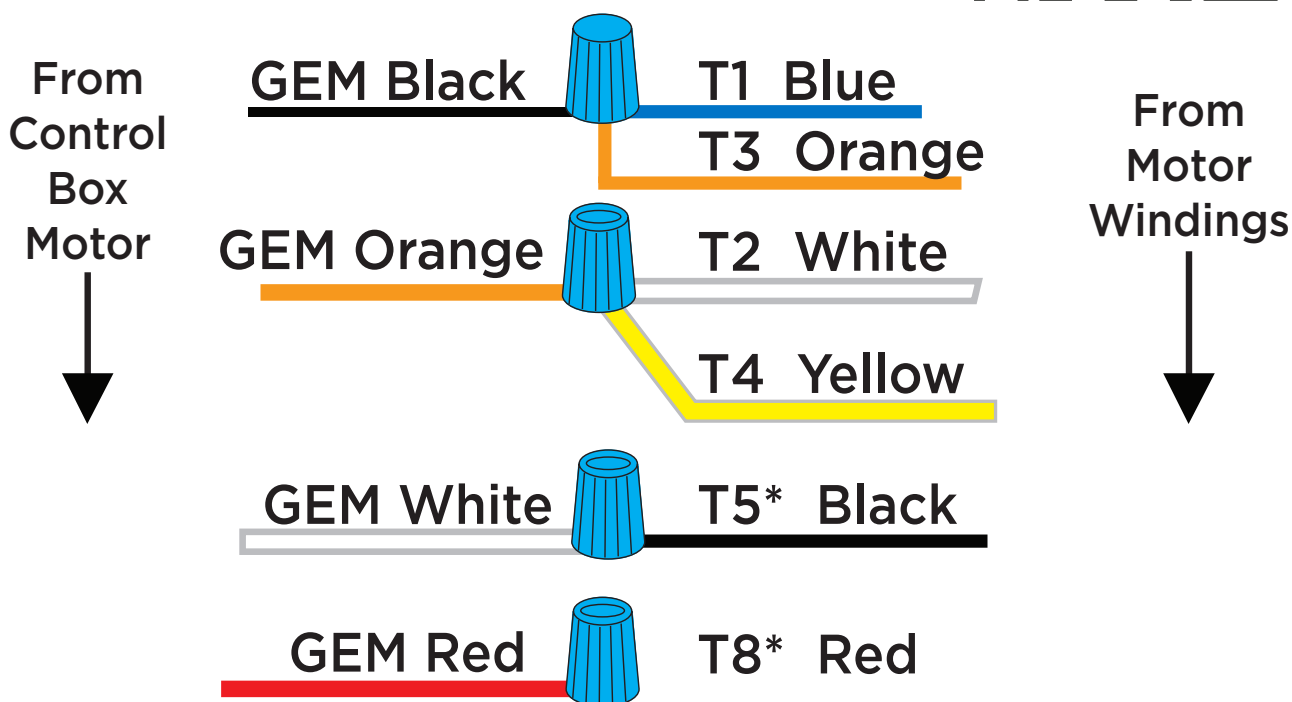

***To change motor direction, switch T5
& T8 motor wires inside the motor!!!!**

To change from 120 to 240 VAC:

1. Cap GEM White wire (not used).
2. Attach 3 motor wires together T3, T5* and T2
3. FYI: Gem Black to T1, GEM Orange to T4, Gem Red to T8



• 239.337.4141 • goldenboatlifts.com •